


Code: 9900105105

Main Features

- Low maintenance sealed unit
- Gel filled reference cell
- BNC connection with Boot plastic Cover
- Cable length 6 meter
- Pellon Diaphragm high accuracy
- Double Junction

Field Application

- General laboratory
- Drinking Water
- Swimming pools
- Water monitoring and control plan

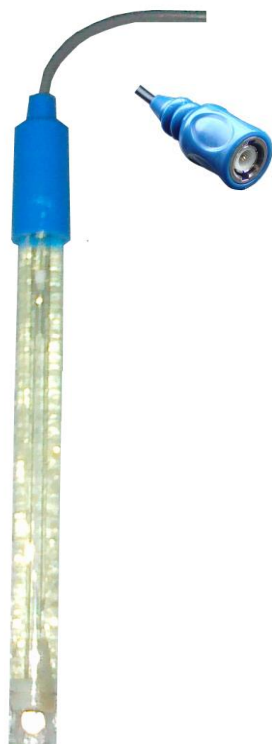

- **Further Features**

- Range: pH 2÷12
- Temperature: 0÷60 °C
- Pressure: 6 Bar
- Trasparten plastic Body
- Double junction with KCL Gel and Pellon diaphragm.
- BLUE cup with 6 meters cable size 3mm, BNC plug included with blue Boot cup.
- Batch production with 4 number to indicate Week and Year production.
- Single Package with neutral carton box.
- Neutral Label.

TECHNICAL CHARACTERISTICS

pH Range	2 ÷ 12
Min. Conductivity	50 µS/cm
Temp. Range	60° C
Pressure Range	up to 6 bar
Body material	Polycarbonate
Membrane material	Glass
Diaphragm type	Pellon number 2
Mechanical Mounting	Ø 12
Electrical Connection	6 m cable + BNC (Blue BOOT Cup)
Reference	GEL
Offset	12 mV
Gain	97% of theoretical or higher
Storage temperature	+2 ÷50 °C (do not freeze)

DIMENSIONS

